


# MAGNETIC TRANSDUCER

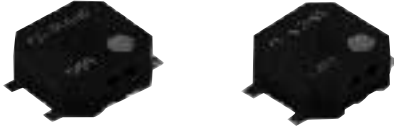

## FEATURES

- SMD small size
- Side opening for sound emission


☆ Value applying rated voltage (resonant frequency, 1/2 duty square wave)

RATED VOLTAGE
OPERATING VOLTAGE
☆ RATED CURRENT
☆ SOUND PRESSURE LEVEL AT 10 CM
COIL RESISTANCE
RESONANT FREQUENCY
OPERATING TEMP. RANGE
STORAGE TEMP. RANGE
WEIGHT
TERMINAL

USE0903S-A2
3VDC
2~5V
max. 80mA
min. 87dB
16 ± 4Ω
2,700 Hz
-30°C to+70°C
-40°C to+85°C
0.5gm
SMD Type

USE0905S-A2
5VDC
4~7V
max. 80mA
min. 87dB
30 ± 4Ω
2,700 Hz
-30°C to+70°C
-40°C to+85°C
0.5gm
SMD Type

Dimensions (Unit: mm ± 0.2)

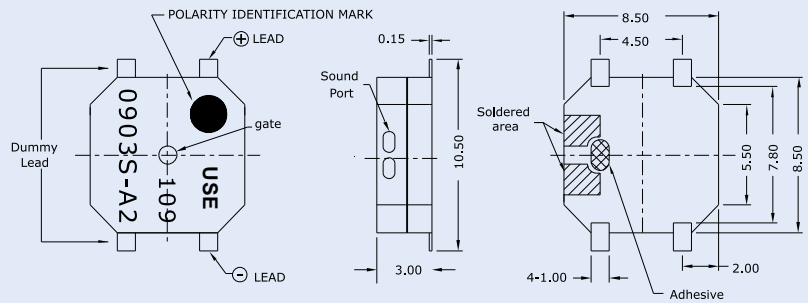

HOUSING MATERIAL : LCP

Frequency Response

