

MAGNETIC TRANSDUCER



FEATURES


Sealed with built-in oscillating circuit for wave soldering and washing

☆ Value applying rated voltage (DC)

RATED VOLTAGE
OPERATING VOLTAGE
☆ RATED CURRENT
☆ SOUND PRESSURE LEVEL AT 10 CM
☆ FREQUENCY OF OUTPUT SIGNAL
OPERATING TEMP. RANGE
STORAGE TEMP. RANGE
WEIGHT

USE1201C-A2	USE1206C-A2	USE1212C-A2
1.5VDC	6VDC	12VDC
1.3~2VDC	3.5~7VDC	8~15VDC
max. 20mA	max. 30mA	max. 30mA
min. 75dB	min. 85dB	min. 85dB
2,300 ± 400 Hz	2,300 ± 300 Hz	2,300 ± 300 Hz
-20°C to +60°C	-20°C to +60°C	-20°C to +60°C
-25°C to +70°C	-25°C to +70°C	-25°C to +70°C
2gms	2gms	2gms

Dimensions (Unit: mm ± 0.5)

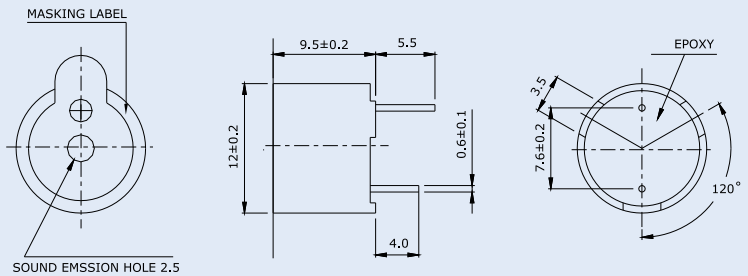

Input Voltage vs.
Sound Pressure Level &
Current Consumption

