

**MAGNETIC
TRANSDUCER**



RATED VOLTAGE
OPERATING VOLTAGE
☆ RATED CURRENT
☆ SOUND PRESSURE LEVEL AT 10 CM
COIL RESISTANCE
RESONANT FREQUENCY
OPERATING TEMP. RANGE
STORAGE TEMP. RANGE
WEIGHT
TERMINAL

Dimensions (Unit: mm ± 0.2)


Frequency Response

FEATURES

- SMD small size
- Side opening for sound emission

☆ Value applying rated voltage (resonant frequency, 1/2 duty square wave)

USE25AL1	USE25AP1
3.0VDC	3.0VDC
2~4V	2~4V
max. 90mA	max. 90mA
min. 85dB	min. 85dB
16 ± 3Ω	16 ± 3Ω
2,300 Hz	2,700 Hz
-30°C to+70°C	-30°C to+70°C
-40°C to+85°C	-40°C to+85°C
0.5gm	0.5gm
SMD Type	SMD Type

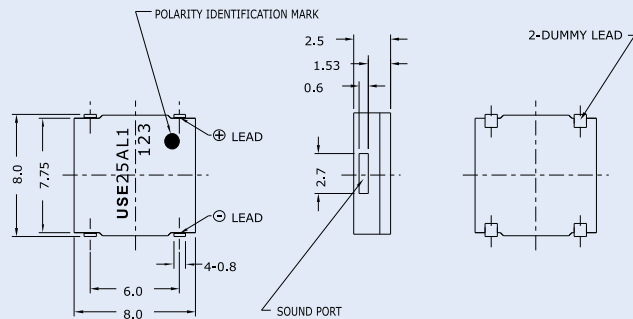

HOUSING MATERIAL : LCP

