

MAGNETIC TRANSDUCER



FEATURES

- SMD small size
- Side opening for sound emission


☆ Value applying rated voltage (resonant frequency, 1/2 duty square wave)

RATED VOLTAGE
OPERATING VOLTAGE
☆ RATED CURRENT
☆ SOUND PRESSURE LEVEL AT 10 CM
COIL RESISTANCE
RESONANT FREQUENCY
OPERATING TEMP. RANGE
STORAGE TEMP. RANGE
WEIGHT
TERMINAL

USE30AL1
3.0VDC
2~4V
max. 85 mA
min. 87dB
16 ± 3Ω
2,300 Hz
-30°C to+70°C
-40°C to+85°C
0.5gm
SMD Type

USE30AP1
3.0VDC
2~4V
max. 80mA
min. 87dB
16 ± 3Ω
2,700 Hz
-30°C to+70°C
-40°C to+85°C
0.5gm
SMD Type

Dimensions (Unit: mm ± 0.2)

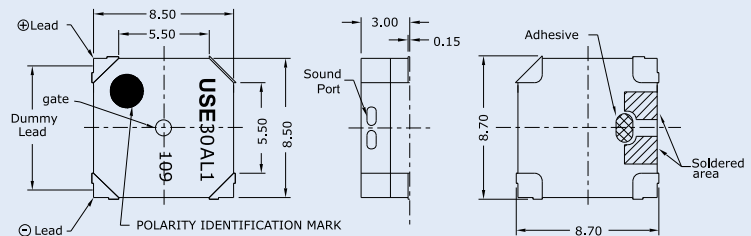

HOUSING MATERIAL : LCP

Frequency Response

