

FEATURES


- SMD small size
- Side opening for sound emission

☆ Value applying rated voltage (resonant frequency, 1/2 duty square wave)

| |
|------------------------------------|
| RATED VOLTAGE |
| OPERATING VOLTAGE |
| ☆ RATED CURRENT |
| ☆ SOUND PRESSURE LEVEL AT 10 CM |
| COIL RESISTANCE |
| RESONANT FREQUENCY |
| OPERATING TEMP. RANGE |
| STORAGE TEMP. RANGE |
| WEIGHT |
| TERMINAL |

| USE30CL1 | USE30CP1 |
|---------------|---------------|
| 3.6VDC | 3.6VDC |
| 2~4.5V | 2~4.5 V |
| max. 80mA | max. 80mA |
| min. 87dB | min. 87dB |
| 25 ± 4Ω | 25 ± 4Ω |
| 2,300 Hz | 2,700 Hz |
| -30°C to+70°C | -30°C to+70°C |
| -40°C to+85°C | -40°C to+85°C |
| 0.8gm | 0.8gm |
| SMD Type | SMD Type |

Dimensions (Unit: mm ± 0.2)

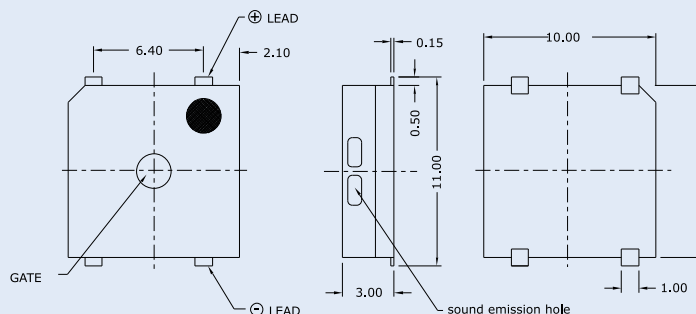

HOUSING MATERIAL : LCP

Frequency Response

